LED iBOND

SMART LIGHT CONTROL

ELECTRICAL INSTALLATION & SYSTEM CONFIGURATION

TRACY & GRACY INDUSTRY with Smart Light Control August 2023



This document provides general information for electrical configuration, installation, and programming of Smart Light Control system with LED iBond's Industry Lighting solution.

NOTICE:

ALL LOCAL BUILDING CODES AND REGULATIONS MUST BE FOLLOWED AT ALL TIMES WHEN INSTALLING THE SYSTEM AND LIGHTING SOLUTION.

1 Indhold

1 In	2					
2 Ir	3					
2.1	.1 System components and overview					
2.2	Functionality	4				
3 E	6					
3.1	System with Master Sensor Unit only (No slave sensor units)	6				
3.2	System with Master Unit only + Slave Uni	6				
3.3	Recommended electrical configuration - Example	7				
3.4	Defining zones					
3.5	Master unit controller – Housing and Junction Box	9				
4 D	10					
4.1	Detection - PIR sensor					
4.2	Detection - Microwave sensor					
5 P	rograming the system with remote controller (IR22)					
5.1	Remote Control IR22 - Overview					
5.2	Programming procedure	14				

2 Introduction to Smart Light Control Solution

LED iBond's Smart Light Control solution is a simple but powerful self-contained plug-and-play solution requiring minimum configuration targeted smaller light installations or installations requiring only limited functionality.

	Basic Light Control	Smart Light Control	Advanced Light Management
LED iBond Technology platform	Simple Sensor Solution	Multi Sensor Solution	Management Solution
Motion detection - On/off luminaire	•	•	•
Daylight Sensor (LUX level)	•	•	•
Grouping of light panels		•	•
Twilight functionality		•	•
Master/Slave configuration		•	•
DALI v2.0 support		•	•
Time <u>scheduler</u> mode			•
Advanced logic across zones			•
Multiple Scenarios support			•
Tablet and PC interface control (Wifi)			•
Battery Back-up (Emergency light)	0	0	0
PIR - Build into light panel	0		
Figure 1 Overview of functionality of the SMAR		Included	O Optional

Figure 1 Overview of functionality of the SMART LIGHT CONTROL solution (compared to LED iBond's BASIC and ADVANCED solutions)

2.1 System components and overview

The system contains the following components:

- 1 Master unit controller with motion detector and daylight monitor.
- X slave units with motion detectors (Slaves units are optional).
- LED power supply(ies) with 2-wire DALI support interface.

Notice: Since the Master Unit controller contains the daylight monitor, pay attention to where this unit is installed to ensure best monitoring of the daylight.

www.ledibond.com Contact: sales@ledibond.com Made in Denmark

System overview:

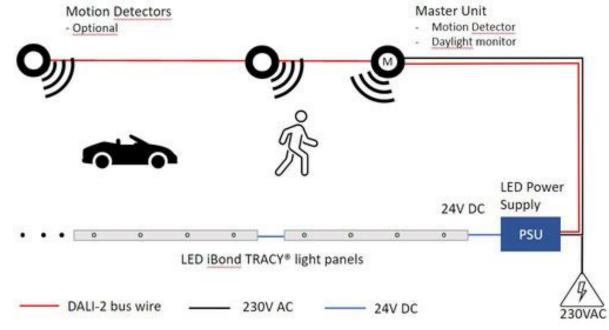


Figure 2 System overview – SMART LIGHT CONTROL SOLUTION

The Slave units are powered through the 2-wire DALI bus. The Master Unit controller requires 110/230V input and contains a DALI power supply that provides 12V DC power to the 2-wire DALI bus.

2.2 Functionality

The solution is based on an application master unit controller with build-in motion sensor and daylight monitoring function. As an option additional slave sensors can be connected to a single master controller to form a complete selfcontained solution that can control a larger number of power supplies driving LED luminaires.

www.ledibond.com Contact: sales@ledibond.com Made in Denmark

Daylight monitoring function.

The master daylight sensor can tell the difference between natural light and artificial light from a lamp and will switch off the luminaires when ambient light is bright enough. When ambient light is below a target level, light is controlled by motion detection only.

By placing more optional motion sensors at various entries to a, e.g., parking facility or service station, it is possible to adjust the light dynamically following pedestrians or vehicles.

Night time operation: Natural light < 2-300 LUX

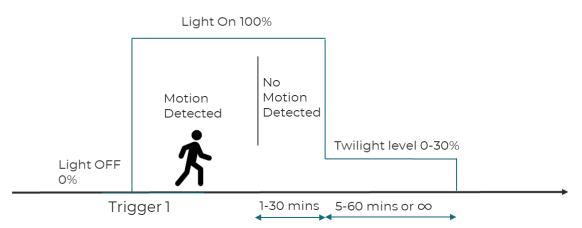


Figure 3 Illustration of functionality of the SMART LIGHT CONTROL solution.

Motion detection

The motion sensors, by detecting the passage of people and vehicles, regulate the luminous flux by varying the intensity between two preset levels: a lower power level (twilight) and a higher power level, more suitable for the presence of people and traffic. Motion detection by any of the sensors in the solution, will trigger light to be turned on.


When motion is not detected anymore, the light will be dimmed to the lower twilight level for a period before light turns off completely.

www.ledibond.com Contact: sales@ledibond.com Made in Denmark


3 Electrical Configuration

The diagrams below show the wiring configuration.

3.1 System with Master Sensor Unit only (No slave sensor units)

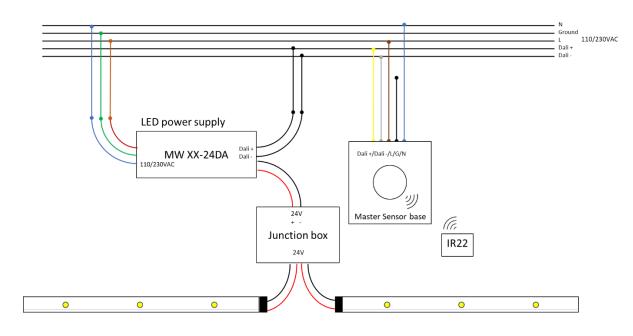


3.2 System with Master Unit only + Slave Uni

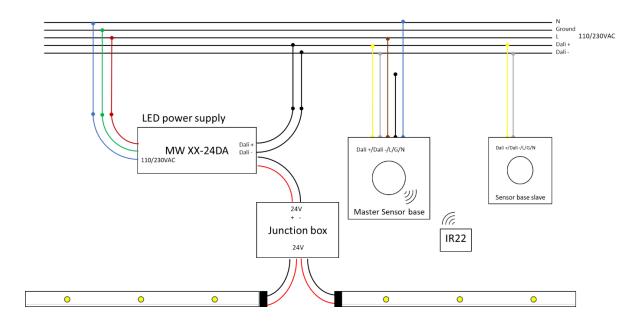

© LED iBond A/S. All rights reserved. Data subject to change August 2023 www.ledibond.com Contact: sales@ledibond.com Made in Denmark

3.3 Recommended electrical configuration - Example

It is recommended to use a 5-wire cable for AC Power (N/Neutral, L/Hot, GND/Ground) and the 2-wire DALI bus as backbone for the network. Use this 5wire cable to form a distribution network to connect the Master Unit controller, all Slave units, and the LED power supplies together in one network. The devices can be connected in any order in the network.

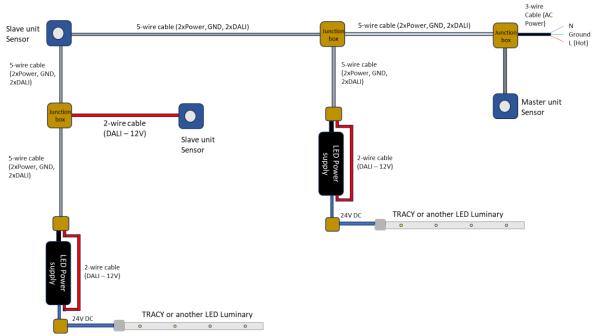

Below is an illustration of a distribution cabling network (example only).

Figure 4 Illustration on ONE distribution network

The Slave units need DALI bus only and no AC power (110/220 VAC). The slave unit housing can be used as a junction box for the 5-wire cable if desired as illustrated above.


NOTICE: Check that local building codes and regulations allow the use of a 5wire cable combining AC power (110/230 VAC) and low voltages DC power. If not allowed, the 5-wire cable needs to be replaced with a 3-wire cable for AC power and second cable with a 2-wire cable for the DALI DC bus.

www.ledibond.com Contact: sales@ledibond.com Made in Denmark

3.4 Defining zones

One network (Figure 4) forms one zone; the Master Unit and all slave sensors in this one zone control all the luminaries connected to the DALI bus network. If more zones are desired, the DALI network needs to be split into more zones by splitting up the DALI network in more subnets.

The zones are defined by the DALI network. Zones can share the same 110/230VAC network.

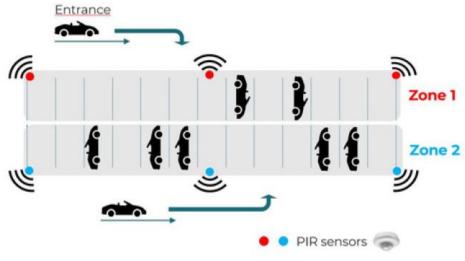

Example of a carport that is split into two zones:

Figure 5 Example of two zones defined for a carport

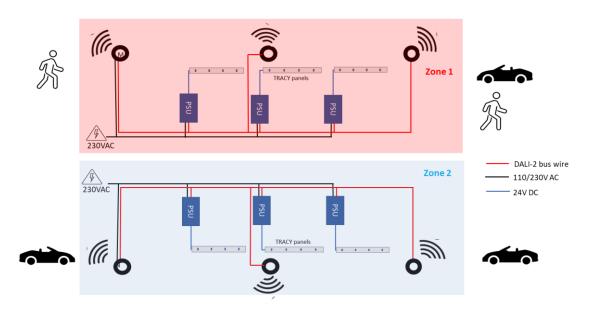


Figure 6 Electrical configuration of two zone solution - Example

© LED iBond A/S. All rights reserved. Data subject to change August 2023 www.ledibond.com Contact: sales@ledibond.com Made in Denmark

3.5 Master unit controller – Housing and Junction Box

The Master Unit controller and Slave units are mounted in housing that can be used as junction box for all the cabling.



Figure 7 Master/Slave units with housing (Junction box). Left: Ceiling mounting Right: Wall mounting.



Figure 8 Interior of Master Unit Controller with DALI 12V DC power supply. Waga connectors for wiring.

© LED iBond A/S. All rights reserved. Data subject to change August 2023 www.ledibond.com Contact: sales@ledibond.com Made in Denmark

4 Detection pattern – Motion Sensors

There are two types of motion detectors: i) PIR and ii) Microwave.


NOTICE: The sensitivity for all slave units is by default set to 100%. It can not be change with the IR22 remote controller. Changing sensitivity for a slave requires DALI configuration software.

Changing sensitivity of a Master Unit controller can be done with the IR22 remote controller.

4.1 Detection - PIR sensor

The detection area depends on the height the sensor is mounted. Typically the detection area equals an circle with a diameter of two time the height; If the sensor I mounted, e.g., 4 meters above the ground level, the detection area is a cirle with a diameter of 8 meters.

Detection pattern

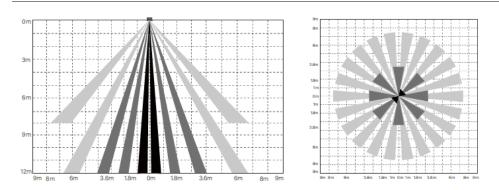


4.2 Detection - Microwave sensor

The detection area depends on the height the sensor is mounted. If mounted on ceiling, e.g., 4 meters above ground, the detection area equals an circle with a diameter of 15 meters. If wall mounted, the detection range may be up to 15-20 meters from the wall.

www.ledibond.com Contact: sales@ledibond.com Made in Denmark

Detection pattern

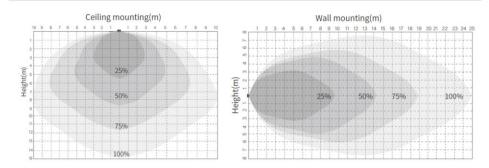

www.ledibond.com Contact: sales@ledibond.com Made in Denmark

5 Programing the system with remote controller (IR22)

The Master unit controller must be programed and configurated using a handheld remote controller (IR22) that use wireless infra-red light for signaling.

Point the remote controller towards the Master unit control to program. The Master unit will respond with green light flashing when it receives data. Max distance between remote controller is ~5 meters.

NOTICE – important information:

- It is only the Master Unit Controller that can be programmed. All Slave units are just motion detectors with a fixed sensitivity of 100%.
- Press the green "Auto" bottom on the remote control once programming is complete. This will store the latest configuration in the Master unit. The configuration is saved even if the Master unit controller is powered off (e.g., due to failure of electrical AC power).

I	on and 2s off. In this mode, when used for tri-level dimming control, after motion detected, sensor enters into	In this mode, when used for on/off control, after motion detected, sensor enters into a cycle of 3s	the operation success. 3. Press "Apply" button to copy the same settings to other sensors, point the remote control to the receiving sensor for min. 2s. Red LED will flicker to indicate the operation success, the receiving sensor	 July Jury Jurg real LED with Increasing on the operation success. Press "Memory" button to memorize all settings parameters. Green LED will flicker ONCE to indicate 	Steps: 1. Long press "Start" button for 2s till green LED permanent on, then input "50%", "100lux", "30s", "11" " 100" the group LED will ficknowe to	One-key memory commissioning e.g.: setting 50% sensitivity,daylight sensor 100lux, hold time 30s, dim off 1h,dim level 10%,	Press "ON/OFF" button, fixture goes to permanent on or permanent off mode, sensor is disabled. *press "Auto", "Reset" to quit this mode.	Remote control IR22 Instruction
	enters into Hold-time: the time period to keep the lamp	trol, after ycle of 3s	90s 5min 10min 30min 10min 30min 1h +∞	30s 10s Dim	2lux 10lux 25lux Ambient Daylight sensor 50lux 100lux 300lux Disable	Start Memory Appy 100% 75% 50% 25%		e the light
When"twilight level" set at 0%, it becomes ON/OFF control.	Note: The lamp flickers once when sensor successfully receives RC signal after pressing any buttons except for "APPLY".	Choose the desired dim level, if you choose 0%, the sensor wil be only on/off sensor, only on / off function.	value learned, and set as the daylight threshold. This feature enables the fixture to function well in any real application circumstance. Choose the desired dim off time. If choose + ∞ , the light will not be turned off, and will keep dimming based on dim level.	Interlight is sufficient, for a sufficient of the sufficient of th	Choose the desired daylight sensor threshold, e.g. 100lux, dim off time 10s: (1) surrounding brightness > 100lux, when the light is off, even though movement,	Press "Power Dim -" button to dim down the power	Press "Power Dim +" button to dim up the power step by step 20%-40%-60%-80%-100%.	Press "Reset" button, all settings go Factory default settings- back to factory default settings. Sensitivity=100% Daylight sensor=disable Hold time=90s Twilloht time=5nin

5.1

www.ledibond.com Contact: sales@ledibond.com Made in Denmark

5.2 Programming procedure

Remote control

IR22

Settings

Permanent ON/OFF function

Press "ON/OFF" button, fixture goes to permanent on or permanent off mode, sensor is disabled.

 Press "Auto", "Reset" or "Ambient learn" to quit this mode.

Auto

Sensor mode

Press "Auto" button, the sensor starts to work and all settings remain the same as the latest status before the light was switched on/off.

Reset function

Press "Reset" button, all settings go back to factory defaulted settings.

* Factory defaulted settings: Sensitivity=100%

Daylight sensor=disable Hold-time=90s Twilight time=5min Twilight level=10%

state terrory task One-key commissioning

san Start

Step 1 Long press "Start" button for 2s till green LED permanent on, then input all desired settings by pressing the buttons in each function zone, the green LED will flicker once to indicate the operation success.

> *The whole settings input process has to be completed within 10s, otherwise, re-operation of step 1 is needed.


Memory

Step 2 Press "Memory" button to memorize all settings

parameters.

Green LED will flicker ONCE to indicate the operation success.

© LED iBond A/S. All rights reserved. Data subject to change August 2023 www.ledibond.com Contact: sales@ledibond.com Made in Denmark Doc. No. Smart Light Control – Electrical configuration



Model: IR22 -

Note:

The lamp flickers once when sensor successfully receives RC signal after pressing any buttons except for "APPLY".

When "twilight level" set at 0%, it becomes ON/OFF control.



Step 3 Press "Apply" button to copy the same settings to other sensors, point the remote control to the receiving sensor for min. 2s. Red LED will flicker to indicate the operation success, the receiving sensor will buzz also to indicate success receival.

> e.g. setting detection range 50%, daylight threshold 200lux, hold-time 30s, dim off 1h, dim level 10%, the steps should be:

- Press "start" button for 2s, choose "50%", "200lux", "30s", "1h", "10%" function zone button.
- 2. Press "memory" button.
- Press "apply" to other sensors, then all of them will share the same settings.

Dim+/-

ŧ

Press "Dim+" button to dim up the power step by step 20%-40%-60%-80%-100%. Press "Dim-" button to dim down the power step by step 100%-80%-60%-40%-20%.

Disable

Press "Disable" button, the daylight sensor will be disabled, the motion sensor will work always, even in daytime.

t) Test mode

"Test mode" is for testing purpose only, for users to check the functionality and choose the desired detection range. The sensor goes to test mode automatically after pressing this button.

Users can quit this mode by pressing "ON/OFF", "Reset", or any button of "Hold-time". The sensor settings are changed accordingly.

*Test mode defaulted settings: Daylight sensor=disable Hold-time=3s

Hold-time=3s Twilight time=N/A Twilight level=N/A

In this mode, after motion detected, sensor enters into a cycle of 3s on and 2s off (0.5s soft off + 1.5s off).

www.ledibond.com Contact: sales@ledibond.com Made in Denmark Doc. No. Smart Light Control – Electrical configuration

Ambient learn

Press "Ambient learn" button, the latest surrounding lux value overwrites previous lux value learned, and set as the daylight threshold. This feature enables the fixture to function well in any real application circumstance.