



LED iBOND KITCHEN

SPECIFICATIONS

PHYSICAL

- Adaptable aluminium LED panels
- Mounted by high bondage glue pads
- Designed as a plug-n-play solution
- Weight: 530 g/m

DIMENSIONS

- LED profiles:
 - 1,800 x 40 x 6 mm (LxWxH)
 - 600 x 40 x 6 mm (LxWxH)
- Installation height: 7.1 mm
(panel 6 mm + glue pads 1.1 mm)

ELECTRICAL/ELECTRONICS (1800mm/600mm)

- Driver not included
- 12VDC system
- Dimmable by compatible driver
- Power consumption: 15W/6 W*

LIFETIME

- L90: > 100,000 hrs
- 5 year warranty

LIGHTING CHARACTERISTICS

- Colour temperature: 3000K
- CRI: > 90
- Beam angle: 65 degrees


PERFORMANCE DATA (1800mm/600mm)

- Total luminous flux: 1,300/495 lm*
- LED profile efficiency
(excl. driver losses): 87/85 lm/W


Maximum ambient temperature 35 degree Celcius.

* Specifications are based on 6 LED spots and 2 LED spots respectively.

MEASURES

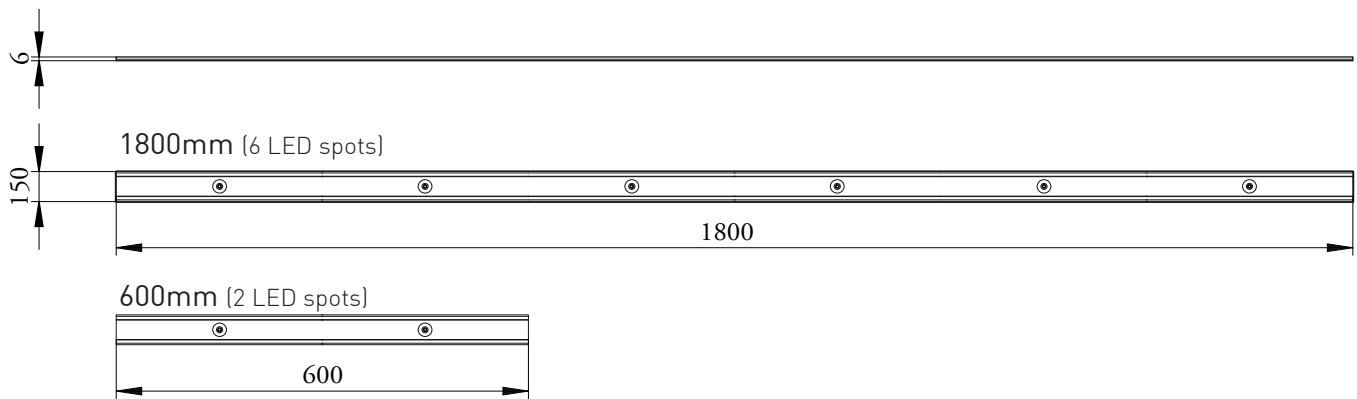

LIGHT DISTRIBUTION

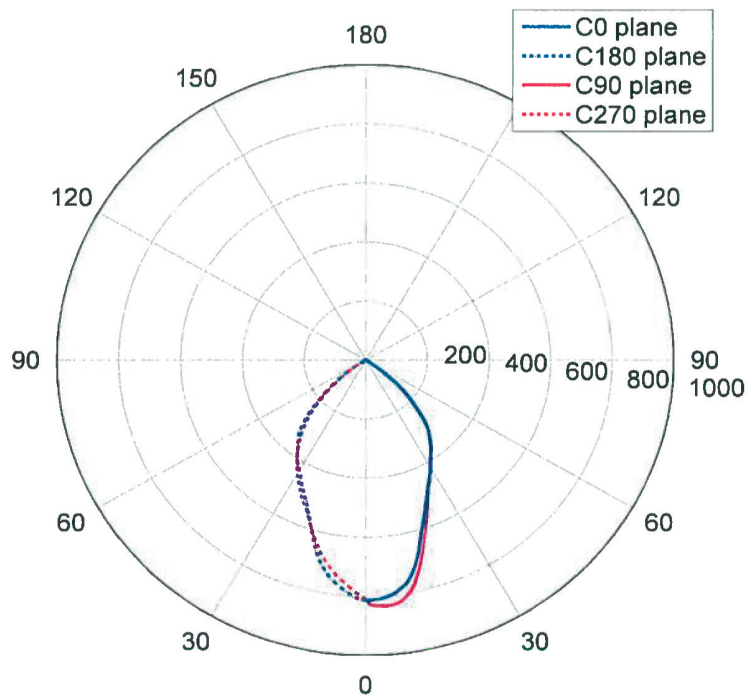

Based on one LED spot @ 4000K and 4W
(Intensity is lower @ 3000K and 3W)