



CANOPY

SPECIFICATIONS

PHYSICAL

- LED Upgrade Panel
- Integration in existing fixtures or surface mount
- Easy installation
- Up to IP65
- Extremely maintenance friendly

DIMENSIONS

- Measures: 560 x 260/360 mm (L x W)
- Panel height: 7,1/8,2/10,0 mm (laminate IP20/
laminate-laminate IP65/laminate-glass IP65)

ELECTRICAL/ELECTRONICS

- High performance and high quality LEDs
- Driver included
- 3in1 dimming (1...10 V, 2DIM and AstroDIM)
- Power consumption: 57 W

LIFETIME

- >100,000 hrs (L90)
- 2 year limited warranty


LIGHTING CHARACTERISTICS

- CCT: 4000 K (Others on request)
- CRI: Ra70+
- Beam angle: 60 degrees

PERFORMANCE DATA


- Total luminous flux: 5,050 lm
- System efficiency
(incl. driver losses): 88 lm/w

LIGHT DISTRIBUTION

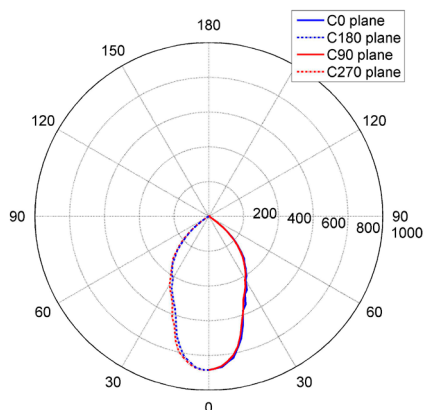

Specifications above are based on LED panel with glass front.
Maximum ambient temperature 35 degree Celcius.

MEASUREMENTS

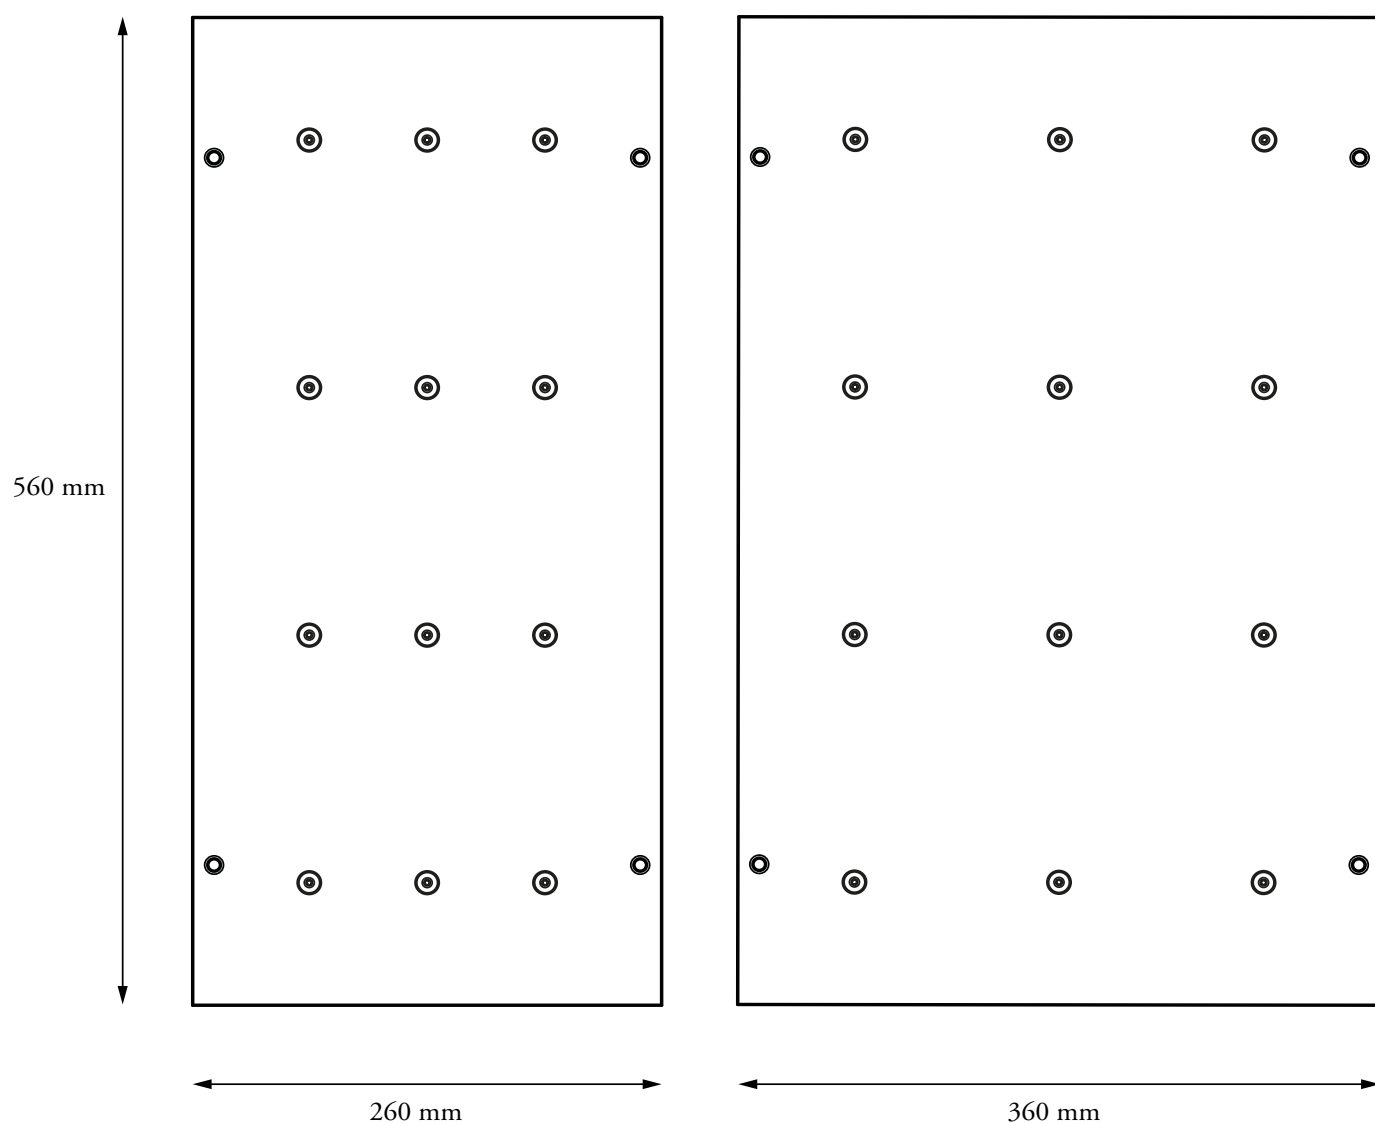

PANEL THICKNESS

