

## Product Description

- Direct/indirect pendant LED luminaire
- White ACP patented light source
- Ceiling box in painted white finish
- Colour temperature in 4000K
- Colour rendering >90
- Dimming via DALI or switchDIM

## Application

The Plane® can be used in a wide range of lighting applications. Use it for task lighting in offices, conference rooms, reception desks, kitchens, and in bars.



## Mains


Voltage range	220-240 VAC
Frequency	50 / 60 Hz
Current	0,22 A
Power	49 W
Power factor	> 0,95
Standby loss	< 0,2 W
Dimming type(s)	DALI or switchDIM
Dimming range	1-100 %

## Photometric


Luminous flux	5000 lm
Luminaire efficacy	102 lm/W
Corelated colour temperature	4000 K
Chromaticity tolerance	5 SDMC*
Colour rendering index	+90

\*3 SDMC in each luminaire

## Dimensions

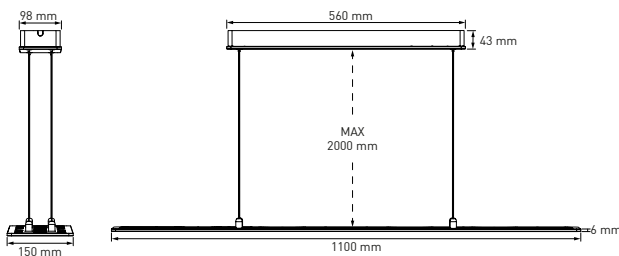

## Light Distribution

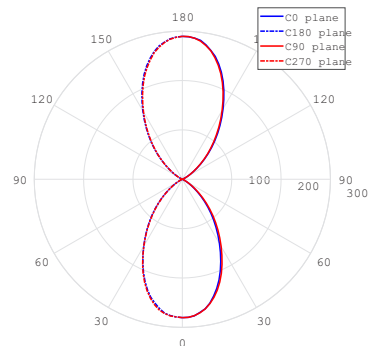

Note: THEPLANE\_4000K.ltd

## Safety & Markings

Marking	CE
Electrical shock protection	Cl. I
Ingress protection	IP20

## Lifetime

L80 @ta 25°C 50.000 hrs

## Order Code

Product description	Art. No.	EAN No.
The Plane® 4000K	51510.A03	5713698000300