




Description

TRACY® is an innovative linear and modular lighting solution with a market-leading lifespan. The lightweight aluminum and 6mm slim design enable multiple applications and is both available for indoor and outdoor use.




96.6% can be recycled


Linear solution

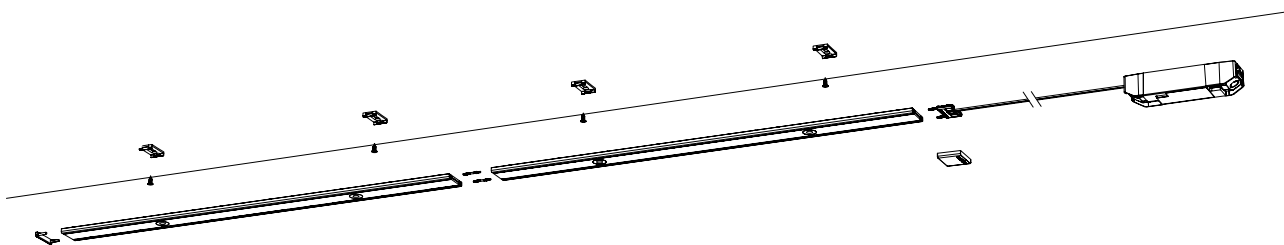


Corner solution

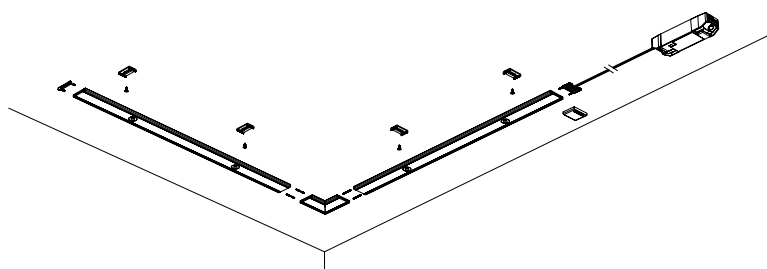

Separated solution

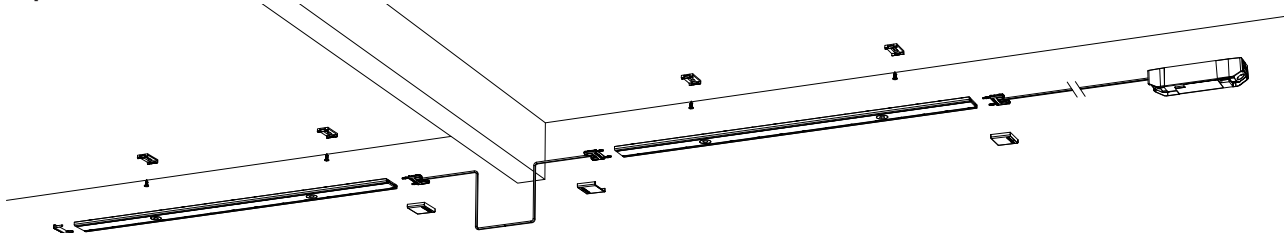


Cut to size

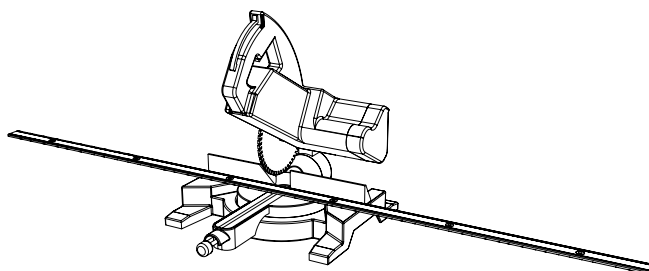




Available LED panels

Dimensions in mm

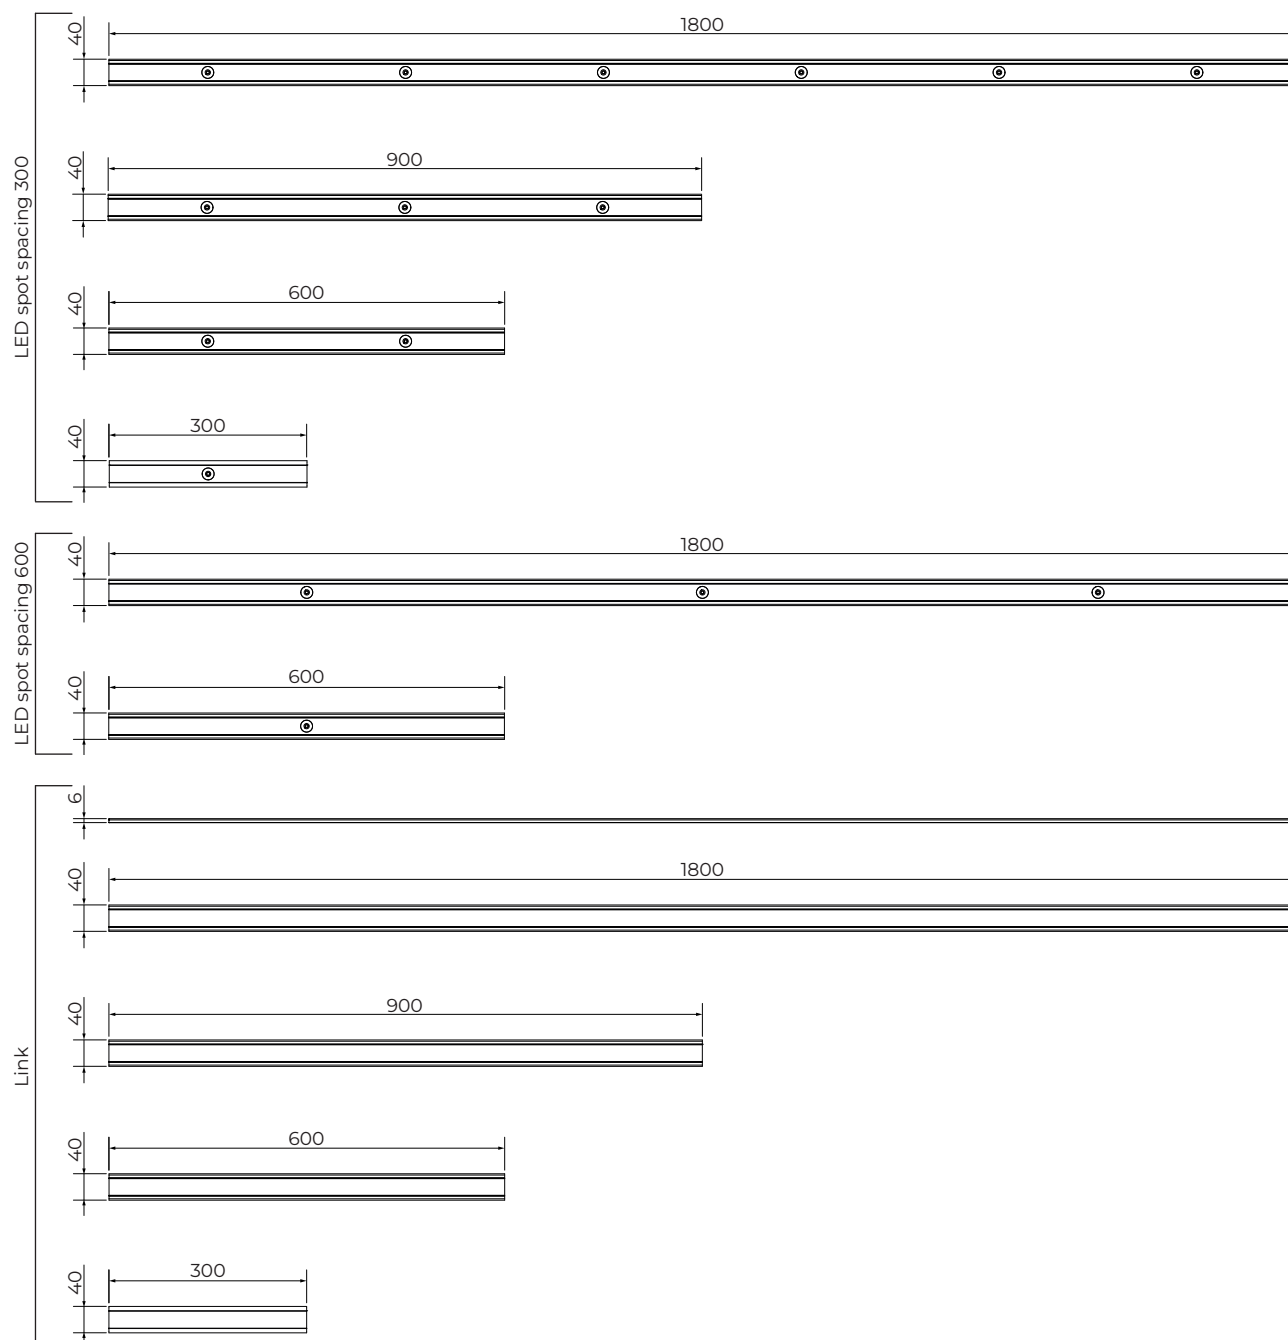



Light Distribution

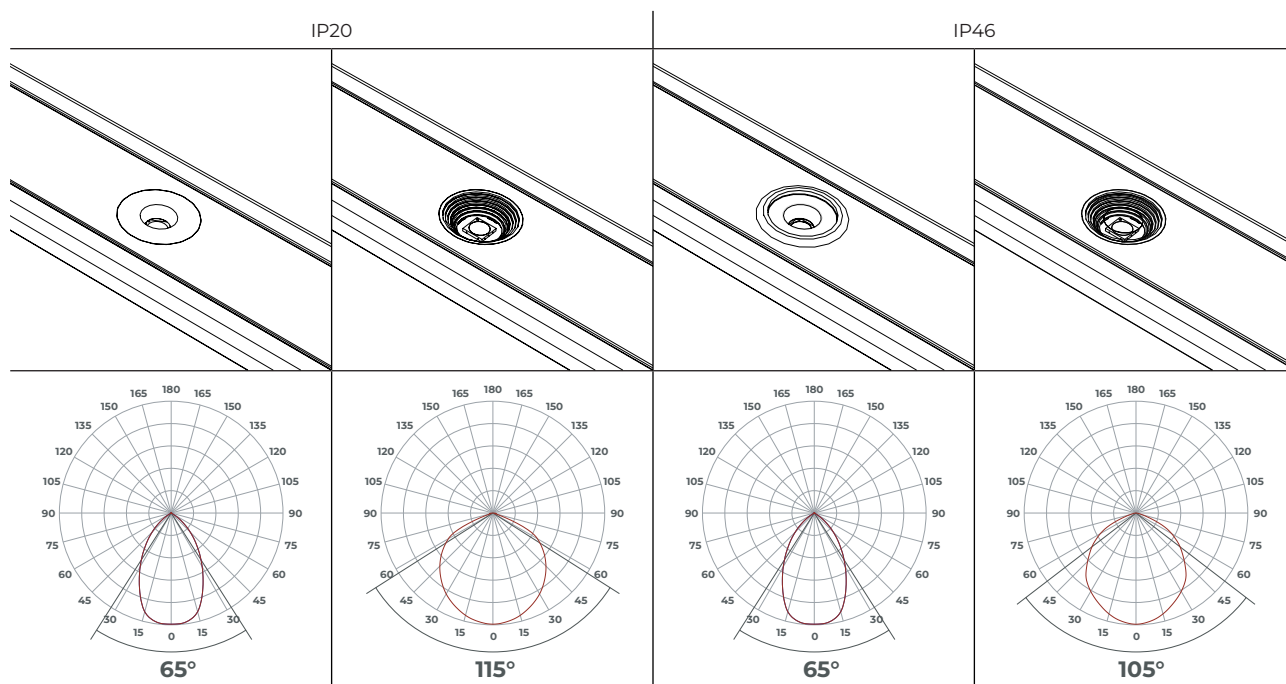

Electrical

Voltage range	24 VDC
Power consumption	1.5 W / LED spot (max 3.6 W)
Dimmable	Yes
Ingress protection	IP20 or IP46

Conformity

Marking	CE
RoHS compliant	Yes
REACH compliant	Yes

Photometric

Luminous flux	200 lm / LED spot (max 470 lm)
Luminaire efficacy	135 lm/W (up to 157 lm/W)
Color temperature (CCT)	3000 K or 4000 K
Color rendering index (CRI)	+90

Lifetime

L80 @ta 25°C	50,000 hrs
--------------	------------



LED driver options

Retail



TRACY PSU 25W
Art. no. 30030

Mains	220-240 VAC 50/60 Hz
Output power	25 W
LED spot range*	3-18
Dimming	DALI, PUSH
IP rating	IP20

*LED spot range depends on LED spot configuration



TRACY PSU 34W
Art. no. 30056

Mains	220-240 VAC 50/60 Hz
Output power	34 W
LED spot range*	8-24
Dimming	DALI, PUSH
IP rating	IP20

Professional



TRACY PSU 75W
Art. no. 30057

Mains	220-240 VAC 50/60 Hz
Output power	75 W
LED spot range*	up to 54
Dimming	-
IP rating	IP65


*LED spot range depends on LED spot configuration




TRACY PSU 150W
Art. no. 30058

Mains	220-240 VAC 50/60 Hz
Output power	150 W
LED spot range*	up to 107
Dimming	-
IP rating	IP65


Accessories




Power cord
Art. no. 51008-D27



Link cord
Art. no. 30059-01




Cord connection box
Art. no. 10230




C connector
Art. no. 51506-D02




Connector pin
Art. no. 51008-D09




Connector socket
Art. no. 51008-D06




Power cord cover
Art. no. 51008-D47




End cap
Art. no. 51008-D49




Mounting clip
Art. no. 51008-D66



Tape pad
Art. no. 10030



Surface cleaner
Art. no. 10029




Allen key
Art. no. 10031



Order Codes

LED Panels Product Description Format

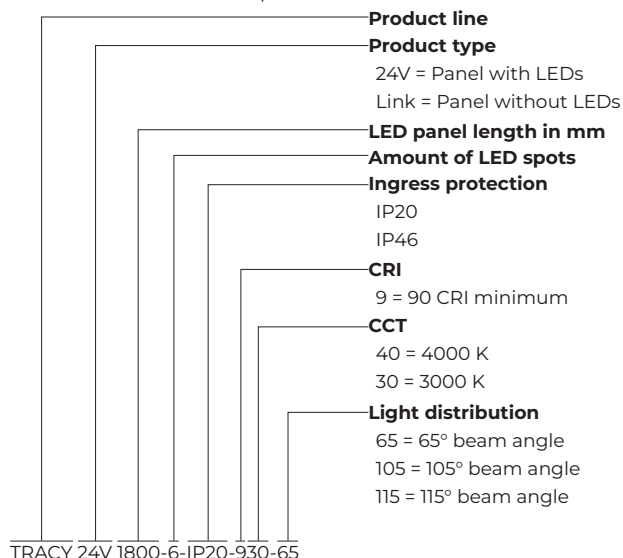

TRACY® LED Panels

Product description	Art. No.	Product Image	Lumen	Power	Note
TRACY 24V 1800-6-IP20-930-65	51563.012		1200 lm	9.8 W	E
TRACY 24V 900-3-IP20-930-65	51563.055		600 lm	4.9 W	E
TRACY 24V 600-2-IP20-930-65	51563.038		400 lm	3.3 W	E
TRACY 24V 300-1-IP20-930-65	51563.021		200 lm	1.6 W	D
TRACY 24V 1800-6-IP20-940-65	51563.016		1200 lm	9.2 W	D
TRACY 24V 900-3-IP20-940-65	51563.059		600 lm	4.6 W	D
TRACY 24V 600-2-IP20-940-65	51563.042		400 lm	3.1 W	D
TRACY 24V 300-1-IP20-940-65	51563.025		200 lm	1.5 W	D



Product description	Art. No.	Product Image	Lumen	Power	Note
TRACY 24V 1800-6-IP20-930-115	51563.010		1200 lm	8.2 W	
TRACY 24V 900-3-IP20-930-115	51563.053		600 lm	4.1 W	
TRACY 24V 600-2-IP20-930-115	51563.036		400 lm	2.7 W	
TRACY 24V 300-1-IP20-930-115	51563.019		200 lm	1.4 W	
TRACY 24V 1800-6-IP20-940-115	51563.014		1200 lm	7.6 W	
TRACY 24V 900-3-IP20-940-115	51563.057		600 lm	3.8 W	
TRACY 24V 600-2-IP20-940-115	51563.040		400 lm	2.5 W	
TRACY 24V 300-1-IP20-940-115	51563.023		200 lm	1.3 W	
TRACY 24V 1800-3-IP20-930-65	51563.004		600 lm	4.9 W	
TRACY 24V 600-1-IP20-930-65	51563.030		200 lm	1.6 W	
TRACY 24V 1800-3-IP20-940-65	51563.008		600 lm	4.6 W	
TRACY 24V 600-1-IP20-940-65	51563.034		200 lm	1.5 W	
TRACY 24V 1800-3-IP20-930-115	51563.002		600 lm	4.1 W	
TRACY 24V 600-1-IP20-930-115	51563.028		200 lm	1.4 W	
TRACY 24V 1800-3-IP20-940-115	51563.006		600 lm	3.8 W	

TRACY® Design

SPECIFICATIONS

LED iBOND



Product description	Art. No.	Product Image	Lumen	Power	Note
TRACY 24V 600-1-IP20-940-115	51563.032		200 lm	1.3 W	
TRACY 24V 1800-6-IP46-930-65	51563.013		1200 lm	10.6 W	
TRACY 24V 900-3-IP46-930-65	51563.056		600 lm	5.3 W	
TRACY 24V 600-2-IP46-930-65	51563.039		400 lm	3.5 W	
TRACY 24V 300-1-IP46-930-65	51563.022		200 lm	1.8 W	
TRACY 24V 1800-6-IP46-940-65	51563.017		1200 lm	9.9 W	
TRACY 24V 900-3-IP46-940-65	51563.060		600 lm	4.9 W	
TRACY 24V 600-2-IP46-940-65	51563.043		400 lm	3.3 W	
TRACY 24V 300-1-IP46-940-65	51563.026		200 lm	1.6 W	
TRACY 24V 1800-6-IP46-930-105	51563.011		1200 lm	8.7 W	
TRACY 24V 900-3-IP46-930-105	51563.054		600 lm	4.3 W	
TRACY 24V 600-2-IP46-930-105	51563.037		400 lm	2.9 W	
TRACY 24V 300-1-IP46-930-105	51563.020		200 lm	1.4 W	
TRACY 24V 1800-6-IP46-940-105	51563.015		1200 lm	8.1 W	
TRACY 24V 900-3-IP46-940-105	51563.058		600 lm	4 W	



Product description	Art. No.	Product Image	Lumen	Power	Note
TRACY 24V 600-2-IP46-940-105	51563.041		400 lm	2.7 W	
TRACY 24V 300-1-IP46-940-105	51563.024		200 lm	1.3 W	
TRACY 24V 1800-3-IP46-930-65	51563.005		600 lm	5.3 W	
TRACY 24V 600-1-IP46-930-65	51563.031		200 lm	1.8 W	
TRACY 24V 1800-3-IP46-940-65	51563.009		600 lm	4.9 W	
TRACY 24V 600-1-IP46-940-65	51563.035		200 lm	1.6 W	
TRACY 24V 1800-3-IP46-930-105	51563.003		600 lm	4.3 W	
TRACY 24V 600-1-IP46-930-105	51563.029		200 lm	1.4 W	
TRACY 24V 1800-3-IP46-940-105	51563.007		600 lm	4 W	
TRACY 24V 600-1-IP46-940-105	51563.033		200 lm	1.3 W	
TRACY 24V 1800-0	51563.001				
TRACY 24V 900-0	51563.044				
TRACY 24V 600-0	51563.027				
TRACY 24V 300-0	51563.018				






TRACY® Power supplies



Product description	Art. No.	Product Image	LED spot range*	Note
TRACY PSU 25 W	30030		3 - 18	
TRACY PSU 34 W	30056		8 - 24	
TRACY PSU 75 W	30057		up to 54	
TRACY PSU 150 W	30058		up to 107	

*LED spot range depends on LED spot configuration

TRACY® Accessories

Product description	Art. No.	Product Image	Dimensions L x W x H	Note
Surface cleaner	10029		59 x 80 x 3 mm	
Tape pad	10030		19 x 42 x 1 mm	
Allen key	10031		51 x 19 x 2 mm	
Cord connection box	10230		52 x 36 x 13 mm	
Link cord	30059-01		1000 x 37 x 5.8 mm	
Connector socket	51008-D06		18 x Ø4 mm	
Connector pin	51008-D09		26 x Ø2 mm	
Power cord	51008-D27		3000 x 37 x 5.8 mm	
Power cord cover	51008-D47		32 x 40 x 6 mm	



Product description	Art. No.	Product Image	Dimensions L x W x H	Note
End cap	51008-D49		16 (3.3) x 40 x 6 mm	
Mounting clip	51008-D66		20 x 37 x 6 mm	
C connector	51506-D02		58 x 58 x 6 mm	