

●●●●● TRACY® Industry  
- for Parking Garages

# TRACY® Industry lighting solution for Parking Garages

6 mm Plug & Play LED panel, 40 meters or 100 spots with only one power plug,  
reducing cabling and installation costs. Customized LUX-levels.



Parking Garage Lüders, Copenhagen Port

LED iBOND

[www.ledibond.com](http://www.ledibond.com)  
[sales@ledibond.com](mailto:sales@ledibond.com)  
Made in Denmark




2x Tracy@Industri 1800-6 connected (Nordhavn)



### TRACY® Industry LED lighting panel

IP67 rated, lightweight aluminum LED panel for direct installation onto concrete beams or steel elements. With our easy Plug & Play solution you can install 6 spots in under 1 min., making it one of the fastest light panels to be installed. We also reduce wiring, as you can go up to 40 meters or 100 spots on one single power connection. Making it perfect for long linear lines of light.

- Seamless integration directly onto beams/ceiling
- Excellent light distribution
- Easy Plug & Play installation
- Up to 40 meters or 100 spots per power connection
- Market-leading LED lifespan
- 6 mm & IP67 rated
- Highly recyclable
- Great alternative to T2, T5, T8 and T12

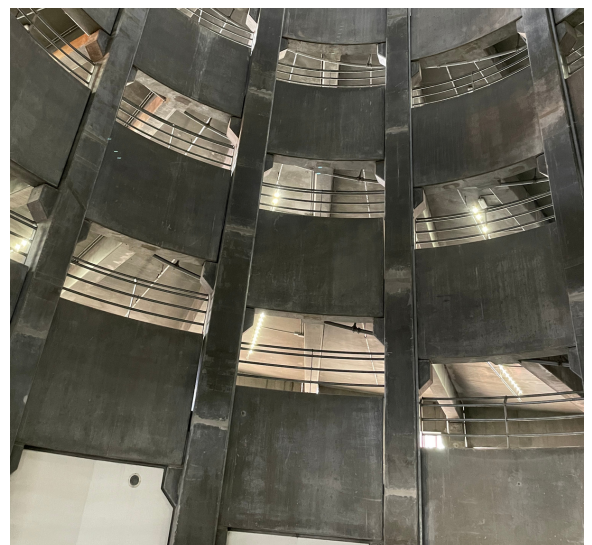

Ramp with Tracy@Industri (Copenhagen Port)



Scan for more info  
on Tracy® for  
Parking Garages



## DIMMABLE

Set the light  
accordingly with  
most lighting  
control systems  
(DALI)

## IP67

IP67 Robust and  
weather resistant  
making it live longer



Made for a  
sustainable world  
with energy saving  
LEDs and 96.6%  
product recyclability

## NATURAL WHITE LIGHT

Nice light to create  
save and secure  
environments

## LIGHT DISTRIBUTION



Securing light to be  
spread nicely on the  
floor to

## 50,000h



Market leading  
product lifespan for  
stability and  
minimal waste

LED iBOND

[www.ledibond.com](http://www.ledibond.com)  
[sales@ledibond.com](mailto:sales@ledibond.com)  
Made in Denmark

# SPECIFICATIONS

Technology	LED Technology
Material	Aluminum
Color	BLACK or SILVER
Height	6 mm
Length	1800mm
Voltage	24 VDC
Power consumption	1,7 W / LED spot (max 3,6 W)
IP	IP67
Luminous flux	200 lm / LED spot (max 450 lm)
Color temperature	3000K - 6500K
Color rendering index	+90
RoHS compliant	Yes
REACH complaint	Yes
Dimmable	Yes
Country of Origin	Denmark

[Full spec sheet available here](#)